
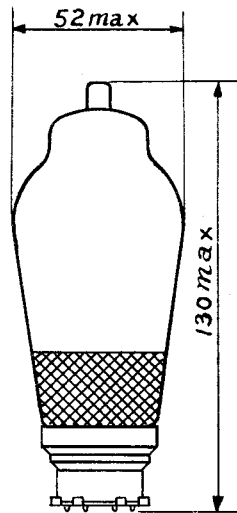


CBL1

Mullard DOUBLE DIODE OUTPUT PENTODE

V _{fk} max.....	125	V
R _{fk} max.....	5,000	ohms
V _d max.....	200	V
V _{d'} max.....	200	V
I _d max.....	0.8	mA
I _{d'} max.....	0.8	mA
V _d max (I _d = + 0.3 uA).....	-1.3	V
V _{d'} max (I _{d'} = + 0.3 uA).....	-1.3	V

Arrangement of electrodes and base connections.

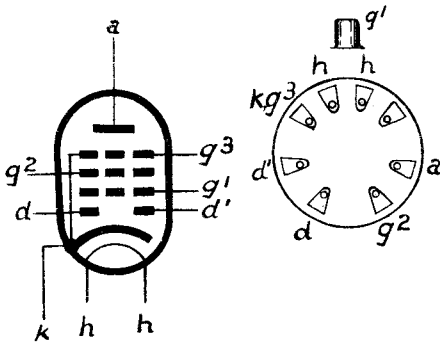


CBL1

Mullard


DOUBLE DIODE OUTPUT PENTODE

CBL1

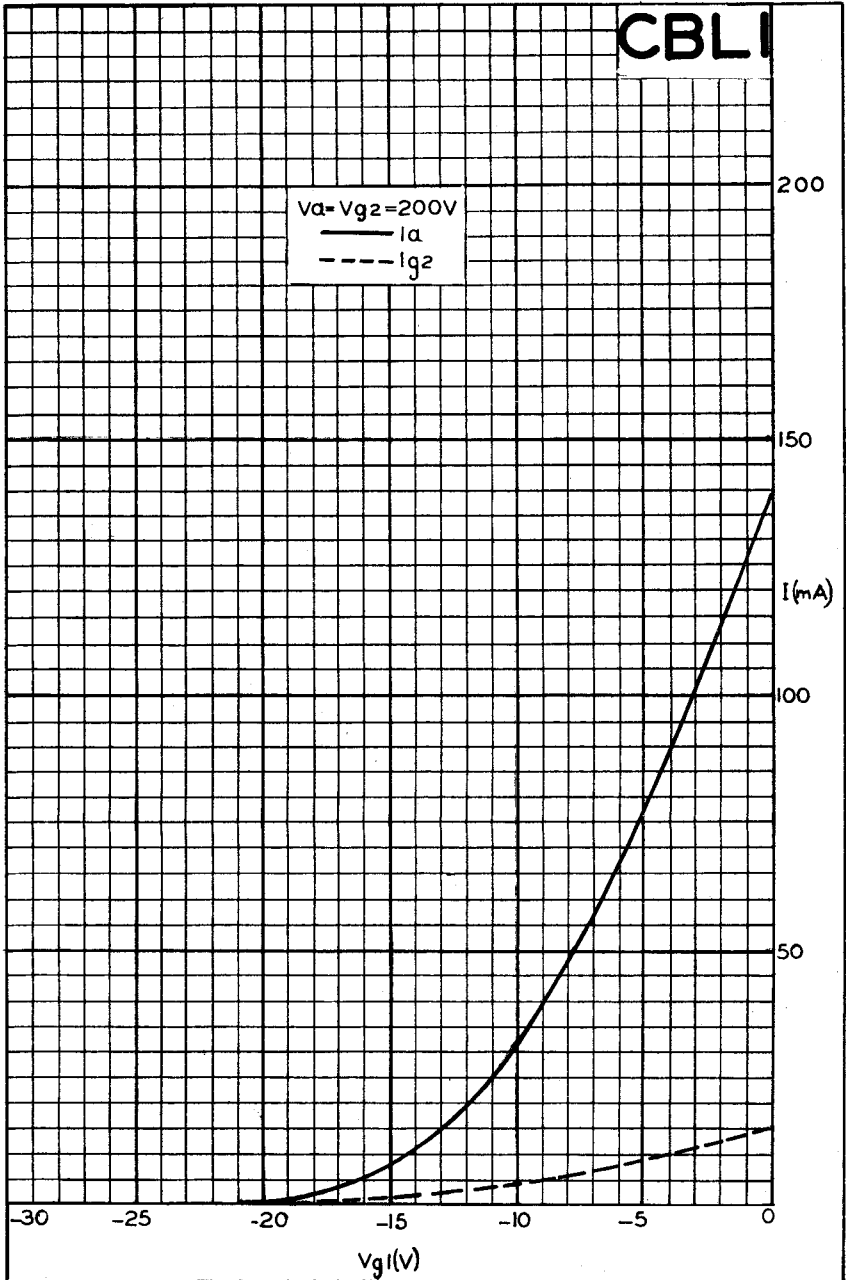

CBL1

Mullard DOUBLE DIODE OUTPUT PENTODE

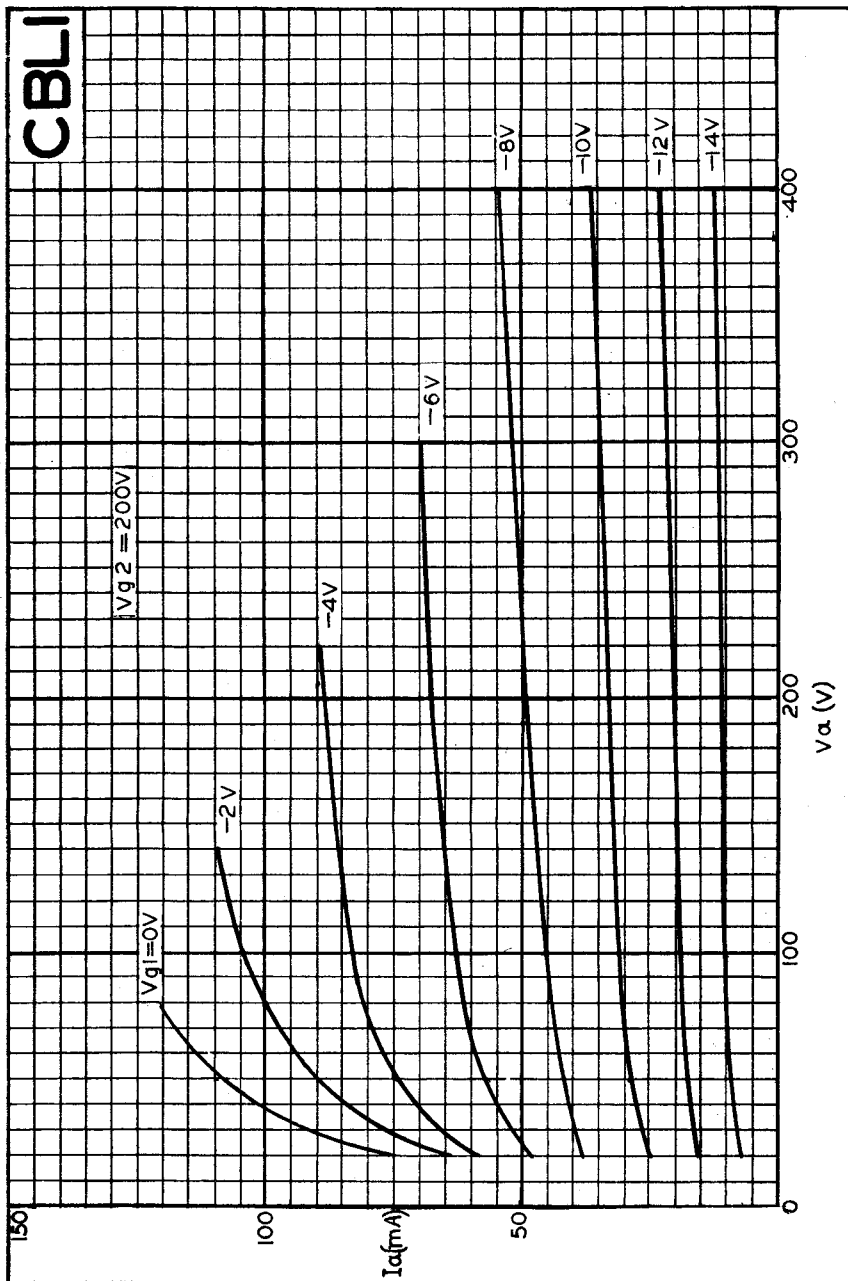

Mullard

DOUBLE DIODE OUTPUT PENTODE

CBL1

CBL1

